
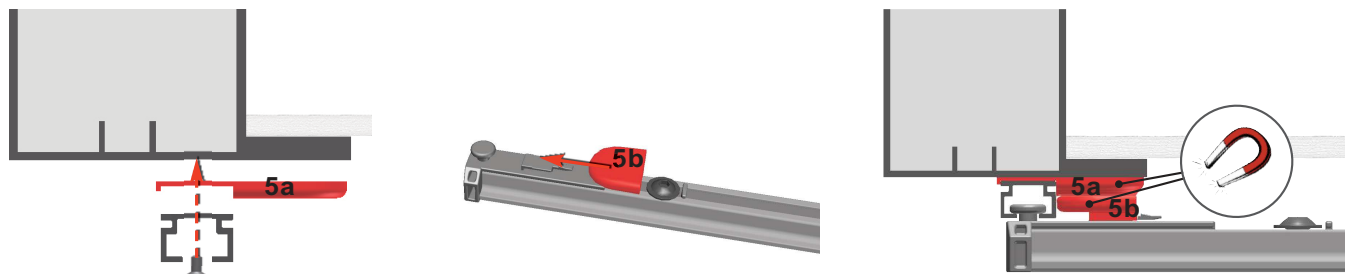


- 1 profile with run 6 mm
- 2 profile with velcro® tape
- 3 stopper
- 4a glider fixed
- 4b glider moveable to compensate minimal tolerances
- 5 magnetic stopper for locking at roof pitches
 - a ceiling adapter with magnet
 - b profile stopper with magnet

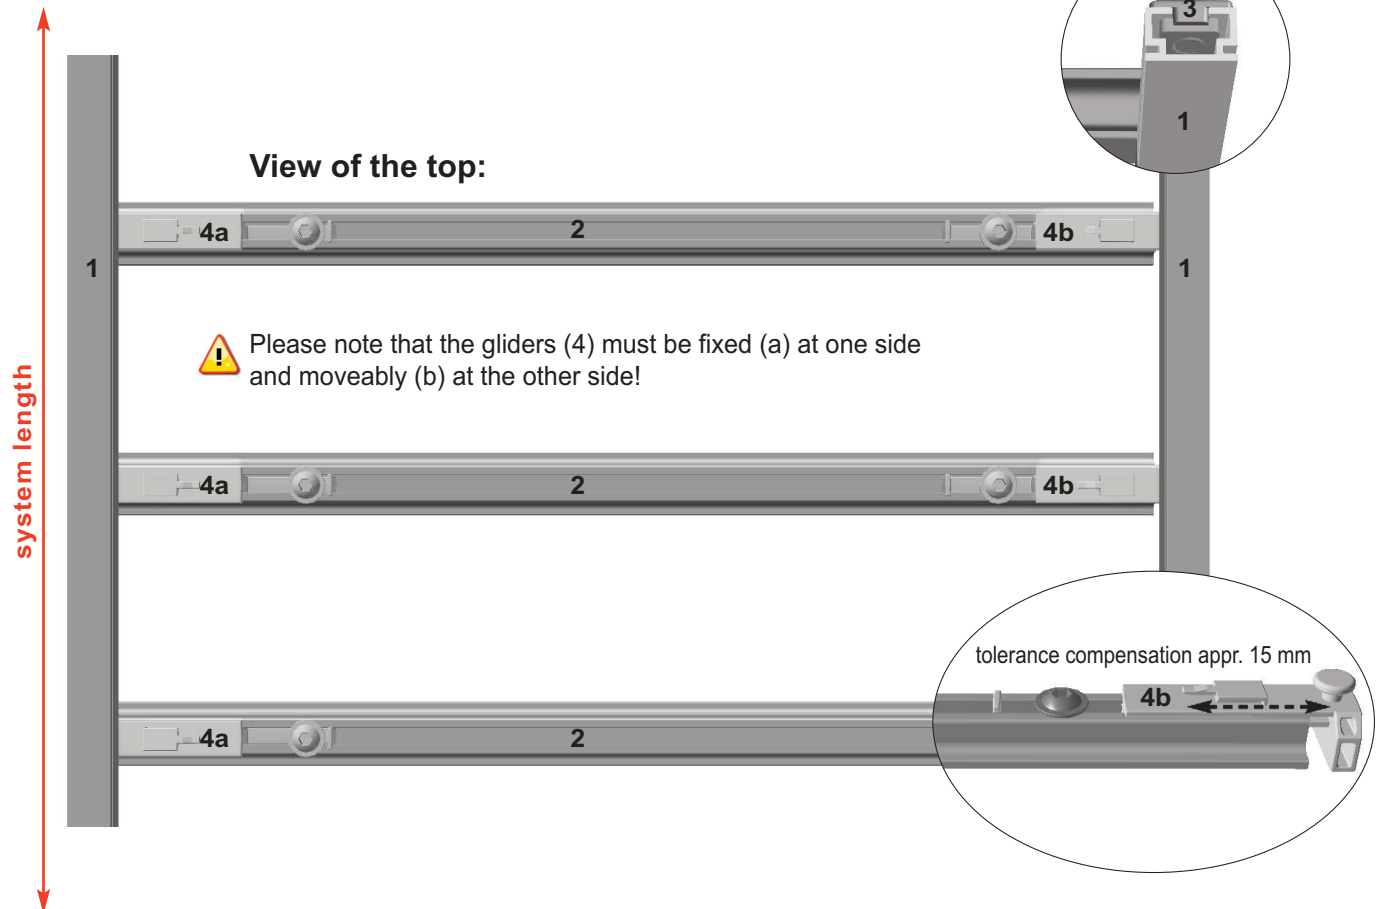

MEASUREMENT FORM - Please fill in and transfer to the order form. To determine the measurements please note the technical details.

TOP VIEW OF THE SYSTEM

	area 1	area 2	area 3	area 4	area 5 ...
system width*	<input type="text"/> mm	<input type="text"/> mm	<input type="text"/> mm	<input type="text"/> mm	<input type="text"/> mm
length	<input type="text"/> mm				
pleat distance (appr. 400 mm if no other informations are provided)	<input type="text"/> mm				

*Please specify the smallest dimension.

quantity	<input type="text"/>	fabric-no.	<input type="text"/>
profile color	<input type="checkbox"/> white <input type="checkbox"/> anthracite <input type="checkbox"/> alu look	velcro® profile col.	<input type="checkbox"/> white <input type="checkbox"/> alu look

inclination angle at roof pitch

°

OPTIONAL ACCESSORIES:

operating rod extendable (85 cm - 150 cm)

pcs.

magnetic ceiling adapter (5a) (for locking the system at roof pitches at several positions - one set magnetic stopper is included)

sets à 2 pcs. 