

## **ORDER FORM**

Retrying (please only mark when the fax is sent again because of an error message.)




CUSTOMER	SHIPMENT ADRESS		MODE OF SHIPMEN	OFFER 1	OFFER NO.	
I	I		parcel service	1		
purchaser / customer no.	company			Please note	if an offer is existed.	
			forwarder	1		
phone	street		_			
			pick up			
fax	postal code city					
contact person	contact person		others	Lstamp		
1	,			1		
commission	delivery date			date	signature	
position system width (mm) system length (mm	pleat or: quantity distance* (mm) velcro® tape fabric r	no. profile rod color	velcro® profile color operation	stack side	operating incl. angle length** (mm) at roof pitch	
		white anthrac. look	white look A B C	D GS HS	$\phantom{aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa$	
		alu white Anthrazit look	white look A B C	D GS HS	✓ 📗	
		alu white Anthrazit look	white look A B C	D GS HS		
		alu white Anthrazit look	white look A B C	D GS HS	$\boxed{\hspace{1cm}} \not \circlearrowleft$	
If several systems should be mounted side by s		formations are provided			Optional:	
pos. 1 pos. 2 po	s. 3 pos. 4 the pleat dis	tance is appr. 400 mm.			assembl. angles (only if required) pcs.	
single clips single cl	ps si <mark>n</mark> gle clips notes				stabilisation for yes no velcro® profile	
double clip double c	ip double clip		operating possible of the DIN	cord knows the content of dangers for children in case o I EN 13120, the purchaser and	at the operator of the shading system with the EU standard DIN EN 13120 and the inon-compliance. In case of non-compliance of operator release the Nölle Kunststofflechnik aused by the operation of the shading system	

with operating cord.







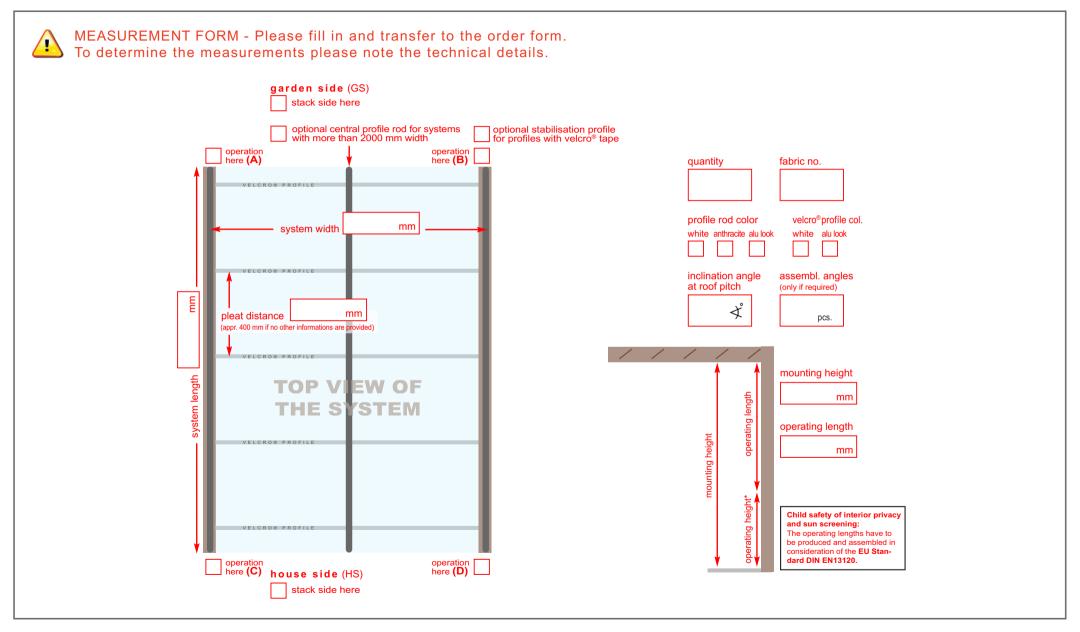





## assembling **SEVERAL SYSTEMS SIDE BY SIDE** > with operating cord

