




HAND 

CORD 

M-TRACK 

PVC
FREE

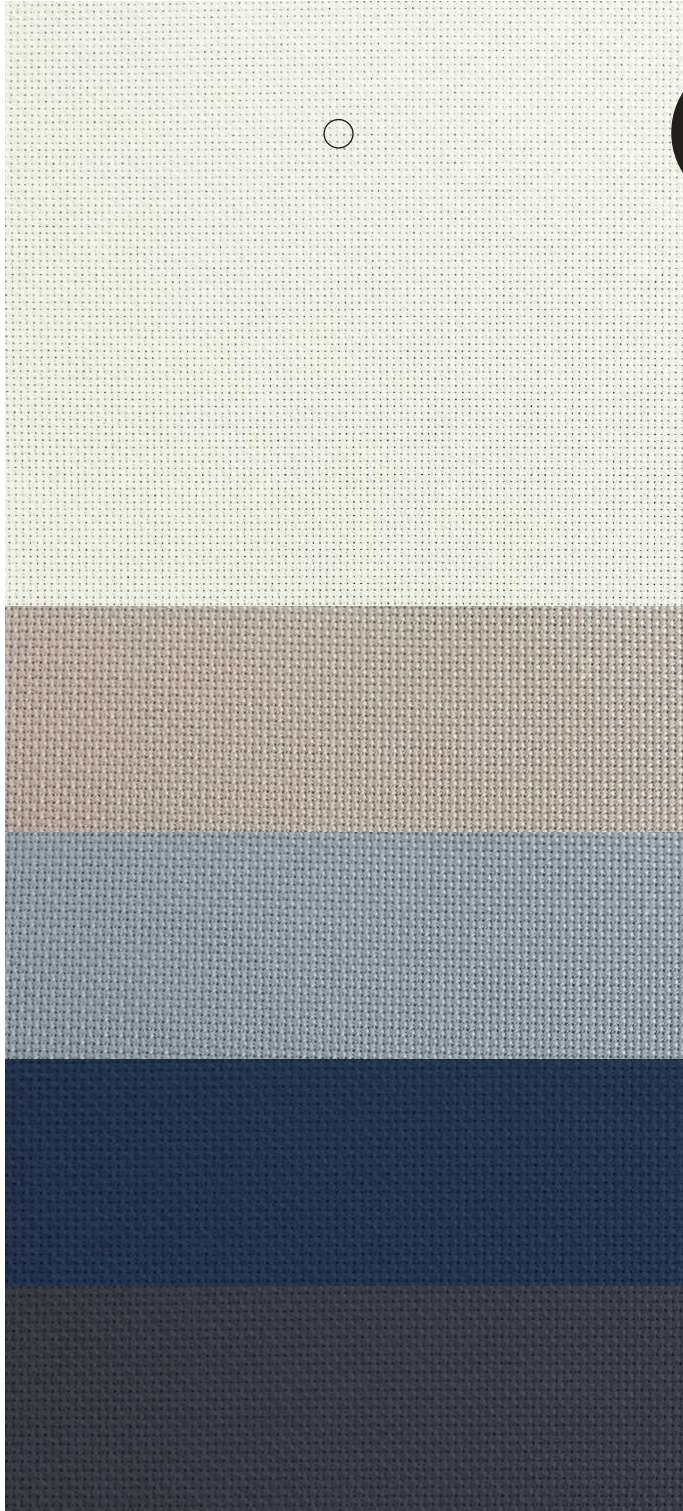

vuscreen

privacy and glare protection
sun protection

VS 01
white

VS 02
linnen

VS 03
steel

VS 04
dark blue

VS 05
anthracite

- UV-resistant and highly fade-resistant
- dirt-resistant and water-repellent
- mould-resistant
- UV and sun protection
- easy to care for
- exceedingly tear-resistant
- extremely high abrasion resistance



VUSCREEN

privacy and glare protection
sun protection



highly flame retardant plain, transparent screen fabric

material composition	ISO 2076	100% polyester
fabric thickness	ISO 5084	0,5 mm +/- 10 %
fabric width	300 cm	+/- 2 cm
flame retardent	DIN 4102 (B1)	
water column	ISO 811	permeable to water as a result of the holes perforating the fabric
weather fastness	ISO 105-B04	grade > 7 ^(of 8)
light fastness	ISO 105-B02	grade > 7 ^(of 8)
temperature resistance	DIN 53361	-30 / +90 °C
chlorine resistance	ISO 105-E03	grade > 4 ^(of 5)

cleaning recommendation



Dirt can be rinsed off using a jet of water (no high pressure). If needed sponge down or soft brush with a small amount of mild detergent using max. 30 °C (86°F) warm water to clean. Strong friction should be avoided. Then repeatedly rinse the fabric with clean water and allow to dry.

finishing

SFC-Finisch: flame retardant, weather and rot proof impregnation

creases as a result
of folding the fabric*

Crease can appear during the cover making process and when the fabric is folded. A dark line may become visible at the crease when viewed against the light, especially with light colours. This is because the fibres are bent when the fabric is folded, which changes the light transmitting quality of the material. This effect has no influence on the quality, functionality or working life of the canvas.

*published by BKTex, German Association of Manufacturing Technical Textiles

Oeko-Tex Standard 100

A96-0071 (Hohenstein HTTI)

REACH-regulation

(EG) Nr. 1907/2006 no SVHC substances in compliance with Article 59 (1) - as of June 2015

